
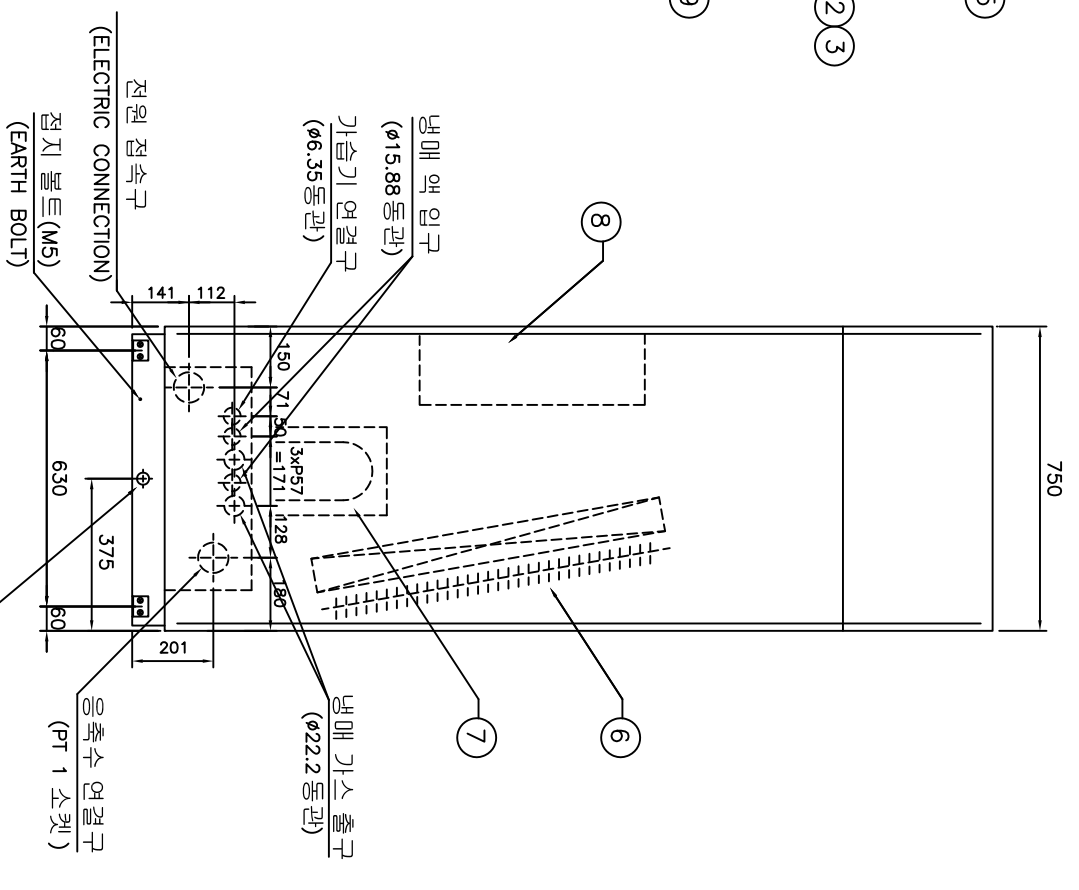
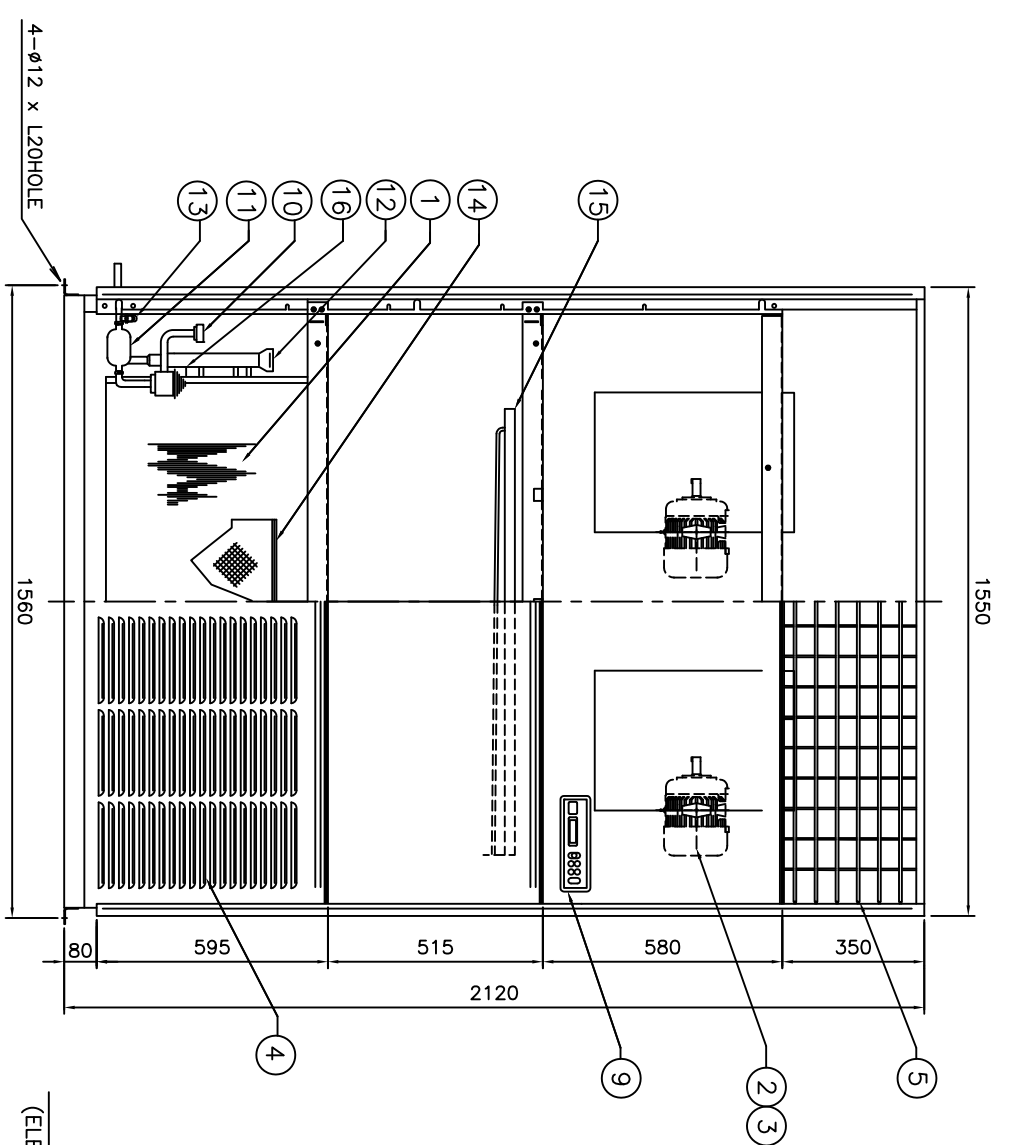
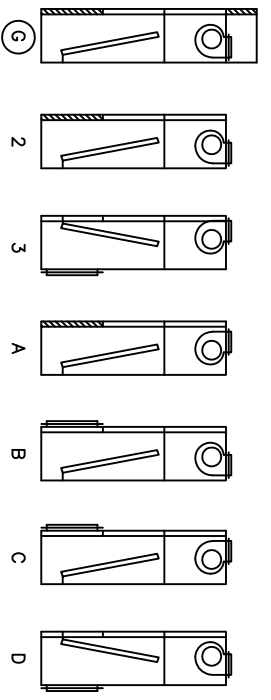


C	B	A	NO.	ALTERATION	DATE	CHKD	APPD
Δ							
Δ							
Δ							
NO.	DESCRIPTION	MTL.	REMARK	SHEAR SIZE	WEIGHT		
1	EVAPORATOR	MULTI-PASS	CROSS FINNED TUBE				
2	BLOWER	DS #	1-5/8 X 2EA				
3	FAN MOTOR	AC 1φ	V 0.75kW 6P 60Hz X 2EA				
4	AIR INLET GRILLE						
5	AIR OUTLET GRILLE						
6	HEATING COIL						
7	HUMIDIFIER						
8	CONTROL BOX						
9	SWITCH BOX						
10	DISTRIBUTOR	C3602BE	ø58				
11	STRAINER(OR FILTER DRIER)	G1201T-1/2H	5/8"				
12	HEADER		ø35				
13	CHECK JOINT						
14	AIR FILTER						
15	HUMIDI. DISTRIBUTOR						
16	EXPANSION VALVE						7.5RT




NOTE

1. STANDARD PIPING DIRECTION IS LEFT.
2. PAINTING COLOR : IVORY WHITE(RAL-341 OR MUNSELL NO. 5.6Y 9.0/1.0)
3. HUMIDIFIER : ELECTRONIC ELECTRODE
4. OUTDOOR UNIT : RC-F7.5G7 X 2UNIT

SPECIFICATIONS

UNIT	MODEL	HT - A15GG3
COOLING CAPACITY	kcal / h	40,500
NOMINAL AIR VOLUME	CMH	130
EXTERNAL STATIC PRESSURE	mmHg	0
HEATING CAPACITY	kcal / h	34,400
HEATING SOURCE	STEAM	kg/cm ² G
HEATING SOURCE	HOT WATER	°C
HEATING SOURCE	ELECTRIC	40 kW
HUMIDIFIER CAPACITY	kg / h	9.0
HUMIDIFIER SOURCE	STEAM	kg/cm ² G
HUMIDIFIER SOURCE	HOT WATER	kg/cm ² G
HUMIDIFIER SOURCE	ELECTRIC	6.8 kW
PIPING		
CONNECTION	COOLING WATER	RIGHT
DIRECTION	HEATING	RIGHT
CONNECTION	HUMIDIFIER	RIGHT
SIZE	FOR COOLING	GAS 7/8" LIQUID 5/8"
STANDARD CONDITION	INDOOR	25°C ± 2°C DB, 55% ± 5% RH
	OUTDOOR	35°C DB

TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE	
PRODUCT NAME	COMPUTER ROOM PACKAGED AIR CONDITIONER	ASSEMBLY DWG.	
MODEL	HT - A15GG3	(AIR COOLED TYPE)	
DWN. BY	DESIGNED BY	THIRD ANGLE PROJECTION	SCALE 1 : 20
	CHKD. BY	REFERENCE DRW. NO.	UNIT : mm
	APPD.	DRAWING NO. HTU150-13120GG	
			
(주) 세원센추리			