C	B	A	NO.	ALTERATION	DATE	CHKD	APPD
			1				
			2				
			3				
			4				

Q'T	Q'T	Q'T	ITEM	DESCRIPTION	MTL.	REMARK	SHEAR SIZE	WEIGHT
		1	01	EVAPORATOR	MULTI-PASS		CROSS FINNED TUBE	
		2	02	BLOWER			DS # 1-3/4 X 2EA	
		2	03	FAN MOTOR		AC 3ø	V 1.1kW 6P 60Hz X 2EA	
		1	04	HEATING COIL			ASS'Y	
		1	05	HUMIDIFIER			ASS'Y	
		1	06	CONTROL BOX			ASS'Y	
		1	07	SWITCH BOX			ASS'Y	
		1	08	HUMIDI. DISTRIBUTOR			ASS'Y	
		2	09	EXPANSION V/V			10R/T	
		2	10	DISTRIBUTOR	C3602BE		ø58	
		2	11	STRAINER(OR FILTER DRIER)			5/8"	
		2	12	HEADER	C1201T-1/2H		ø38	
		4	13	CHECK JOINT			ASS'Y	
		2	14	AIR FILTER	염화비닐		ASS'Y	
		2	15	AIR FILTER	부직포		ASS'Y	
		1	16	AIR INLET GRILLE			ASS'Y	
		1	17	AIR OUTLET GRILLE			ASS'Y	

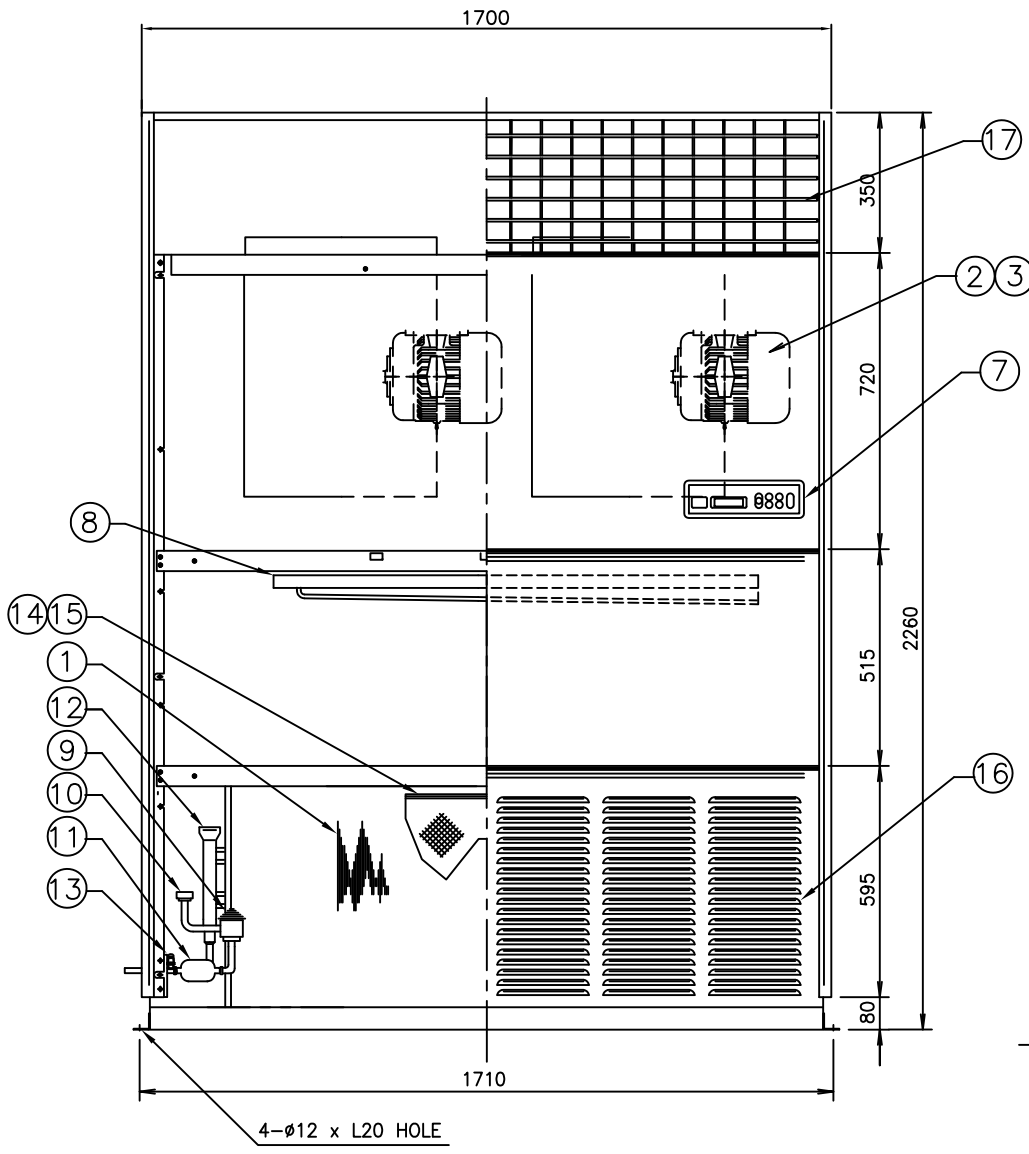

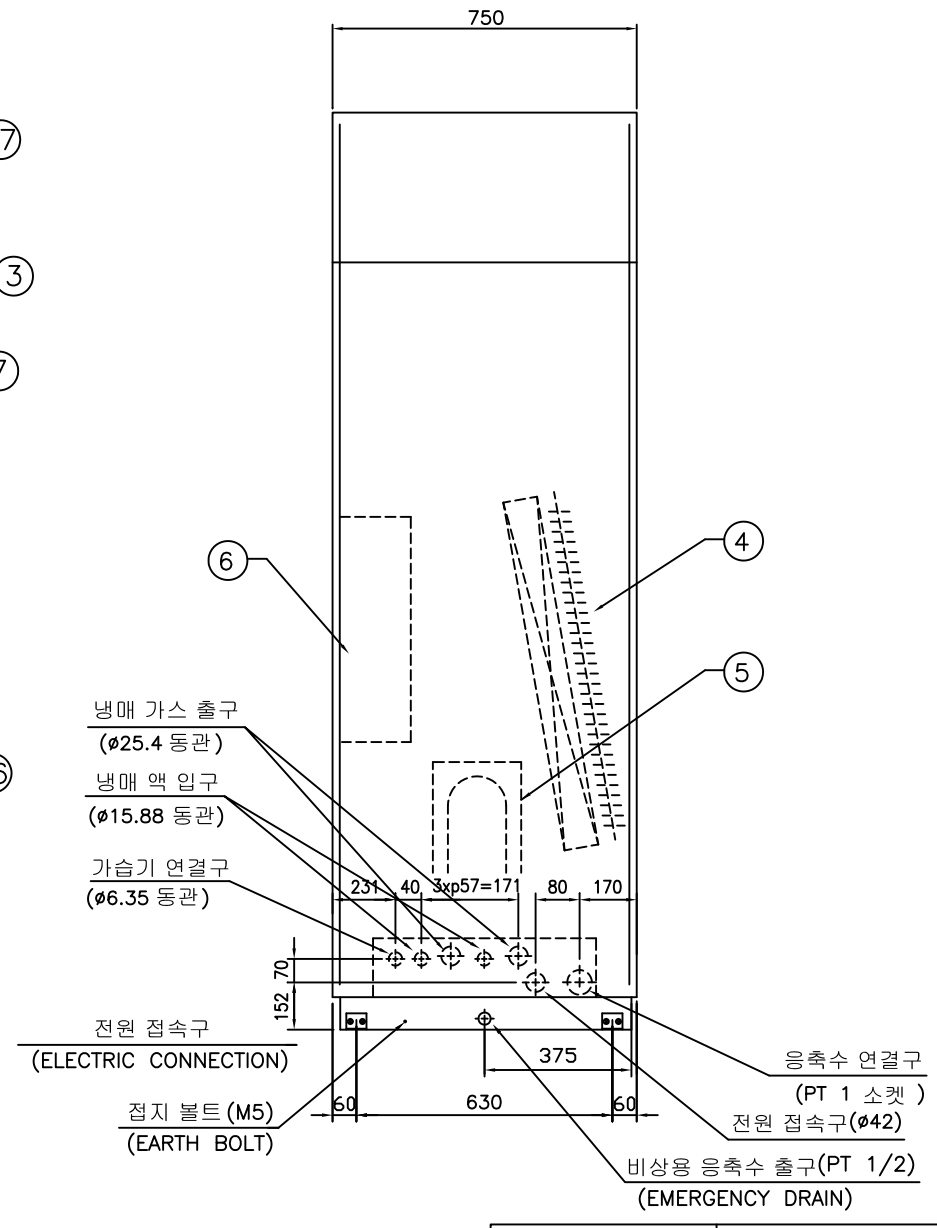

SPECIFICATIONS

UNIT / MODEL			HT - A20GG3
COOLING CAPACITY		kcal / h	54,000
NORMINAL AIR VOLUME		CMM	180
EXTERNAL STATIC PRESSURE		mmAq	0
HEATING	HEATING CAPACITY	kcal / h	43,000
	SOURCE STEAM		kg/cm² G ROW
	SOURCE HOT WATER		°C ROW
	SOURCE ELECTRIC		50 kW
HUMIDIFIER	HUMIDIFIER CAPACITY	kg / h	13.5
	SOURCE STEAM	kg/cm² G	
	SOURCE HOT WATER	kg/cm² G	
	SOURCE ELECTRIC	kW	10.1 kW x 1 STEP
PIPING	CONNECTION DIRECTION	COOLING WATER	RIGHT LEFT
		HEATING	RIGHT LEFT
		HUMIDIFIER	RIGHT LEFT
	CONNECTION SIZE	FOR COOLING	GAS 1" LIQUID 5/8"
		FOR HEATING	INLET A OUTLET A
STANDARD CONDITION	INDOOR		25°C ± 2°C DB, 55% ± 5% RH
	OUTDOOR		35°C DB

NOTE

1. STANDARD PIPING DIRECTION IS LEFT.
2. PAINTING COLOR : IVORY WHITE(RAL-341 OR MUNSELL NO. 5.6Y 9.0/1.0)
3. HEATER : MAGNET CONTROL
   HUMIDIFIER : ELECTRONIC ELECTRODE
4. OUTDOOR UNIT : RC-F10G7 x 2UNIT

TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT NAME	COMPUTER ROOM PACKAGED AIR CONDITIONER	TITLE	ASSEMBLY DWG. (AIR COOLED TYPE)
	MODEL	HT - A20GG3		
	DWN. BY / DESIGNED BY / CHKED. BY / APPD.		THIRD ANGLE PROJECTION	SCALE 1 : 20 / UNIT : mm
			REFERENCE DRW. NO.	
	Sewon (주) 세원센추리		DRAWING NO.	HTU200-13120GG