


송풍 방향

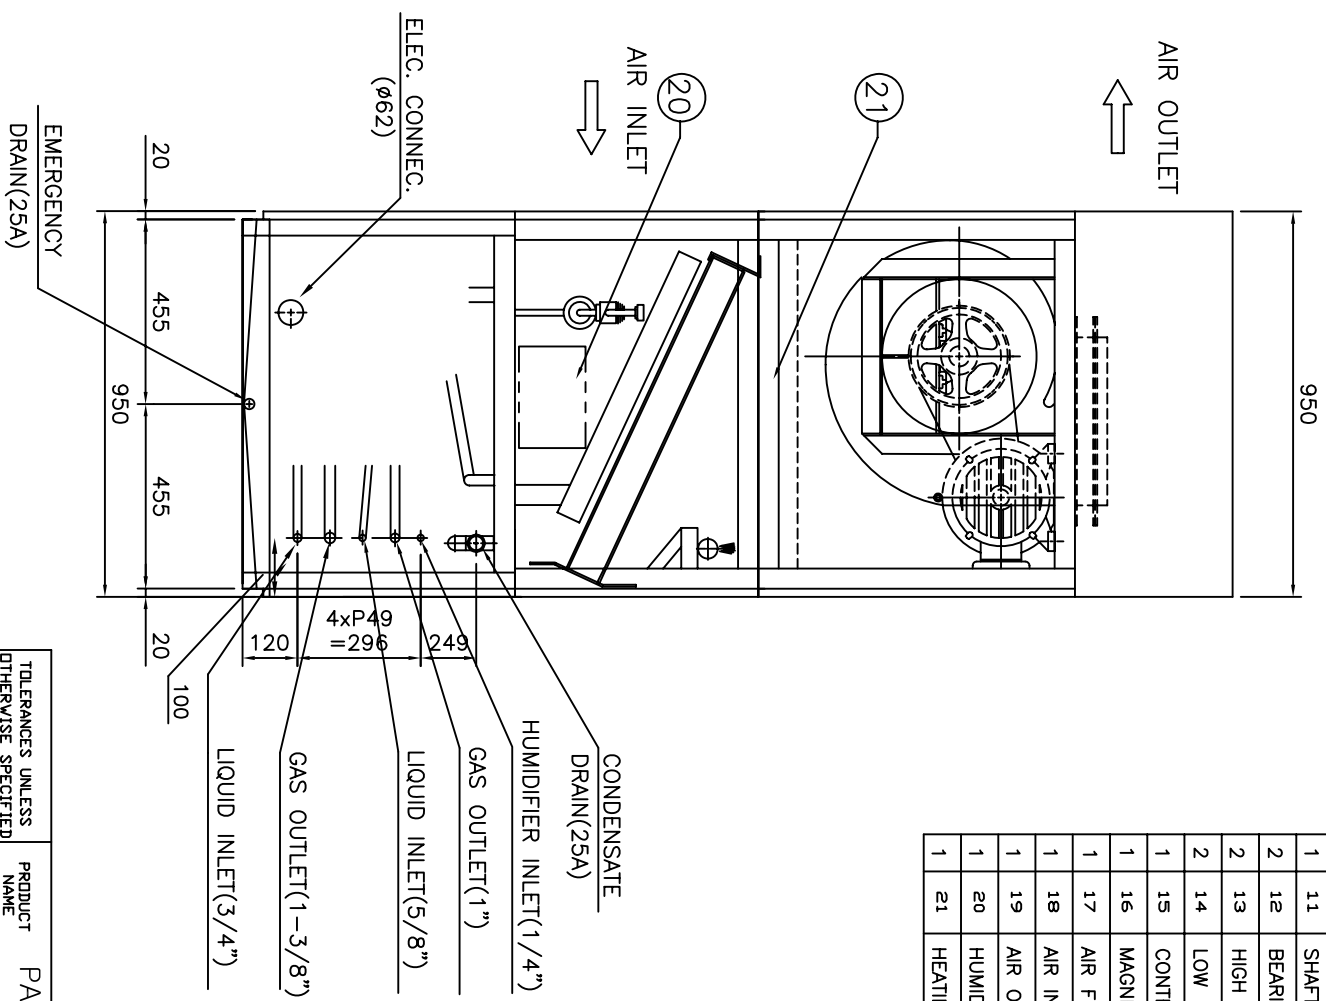

A		MARK		REVISION RECORD		DATE	REVISED BY	CHECKED BY	APP'D.
PA-A20GM2									
1	01	EVAPORATOR							
2	02	EXPANSION V/V							
2	03	HEADER							
2	04	DISTRIBUTOR							
2	05	STRAINER(OR FILTER DRIER)							
1	06	BLOWER MOTOR							
1	07	MOTOR PULLEY							
3	08	V-BELT							
2	09	BLOWER							
1	10	BLOWER PULLEY							
1	11	SHAFT							
2	12	BEARING							
2	13	HIGH PRESSURE GAUGE							
2	14	LOW PRESSURE GAUGE							
1	15	CONTROL S/W BOX							
1	16	MAGNETIC S/W BOX							
1	17	AIR FILTER							
1	18	AIR INLET							
1	19	AIR OUTLET							
1	20	HUMIDIFIER(PAN TYPE)							
1	21	HEATING COIL(EHC)							

SPECIFICATIONS

ITEM	UNIT	MODEL	
COOLING CAPACITY	Kcal / h	HT-A25GG3 56,000	
NOMINAL AIR VOLUME	CMM	220	
EXTERNAL STATIC PRESSURE	mmAq	0	
HEATING CAPACITY	Kcal / h	46,440	
		kg/cm ² G	ROW
HEATER	SOURCE	HOT WATER	54 kW
		ELECTRIC	15
HUMIDIFIER	SOURCE	HUMIDIFIER CAPACITY	kg/h
		STEAM	kg/cm ² G
PIPING	CONNECTION DIRECTION	HOT WATER	kg/cm ² G
		RIGHT	RIGHT
HEATING	CONNECTION SIZE	RIGHT	RIGHT
		LEFT	LEFT
GAS & LIQUID	FOR HEATING	RIGHT	GAS 1-3/8" LIQUID 5/8"
		LEFT	GAS 1-3/8" LIQUID 3/4"
STANDARD CONDITION	INDOOR	27 °C	
	OUTDOOR	35 °C DB	

TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT NAME	MODEL	TITLE
1 ~ 4	PACKAGED AIR CONDITIONER <td>HT-A25GG3 <td>ASSEMBLY DWG.</td> </td>	HT-A25GG3 <td>ASSEMBLY DWG.</td>	ASSEMBLY DWG.
4 ~ 16			(AIR COOLED TYPE)
16 ~ 63			
63 ~ 200			
200 ~ 400			
400 ~ 2000			



(주)세원센추리

HTU250-13120G

NOTE:

- 색상 : MUNSELL 5Y 6.5/1
- 본 도면은 "G" TYPE 기준임.