

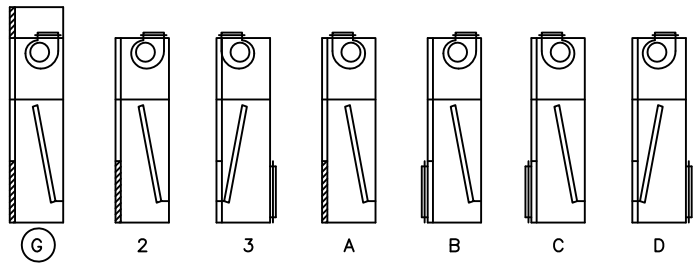

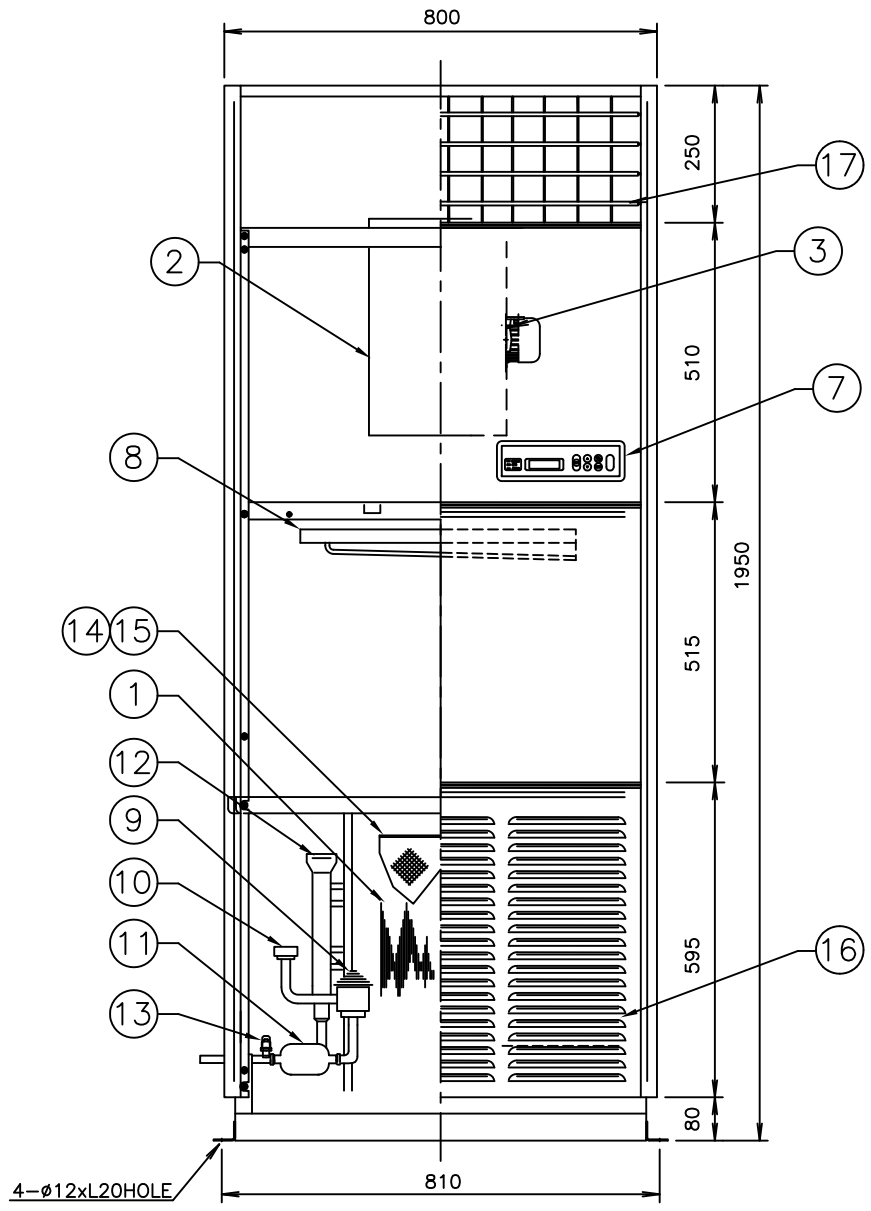

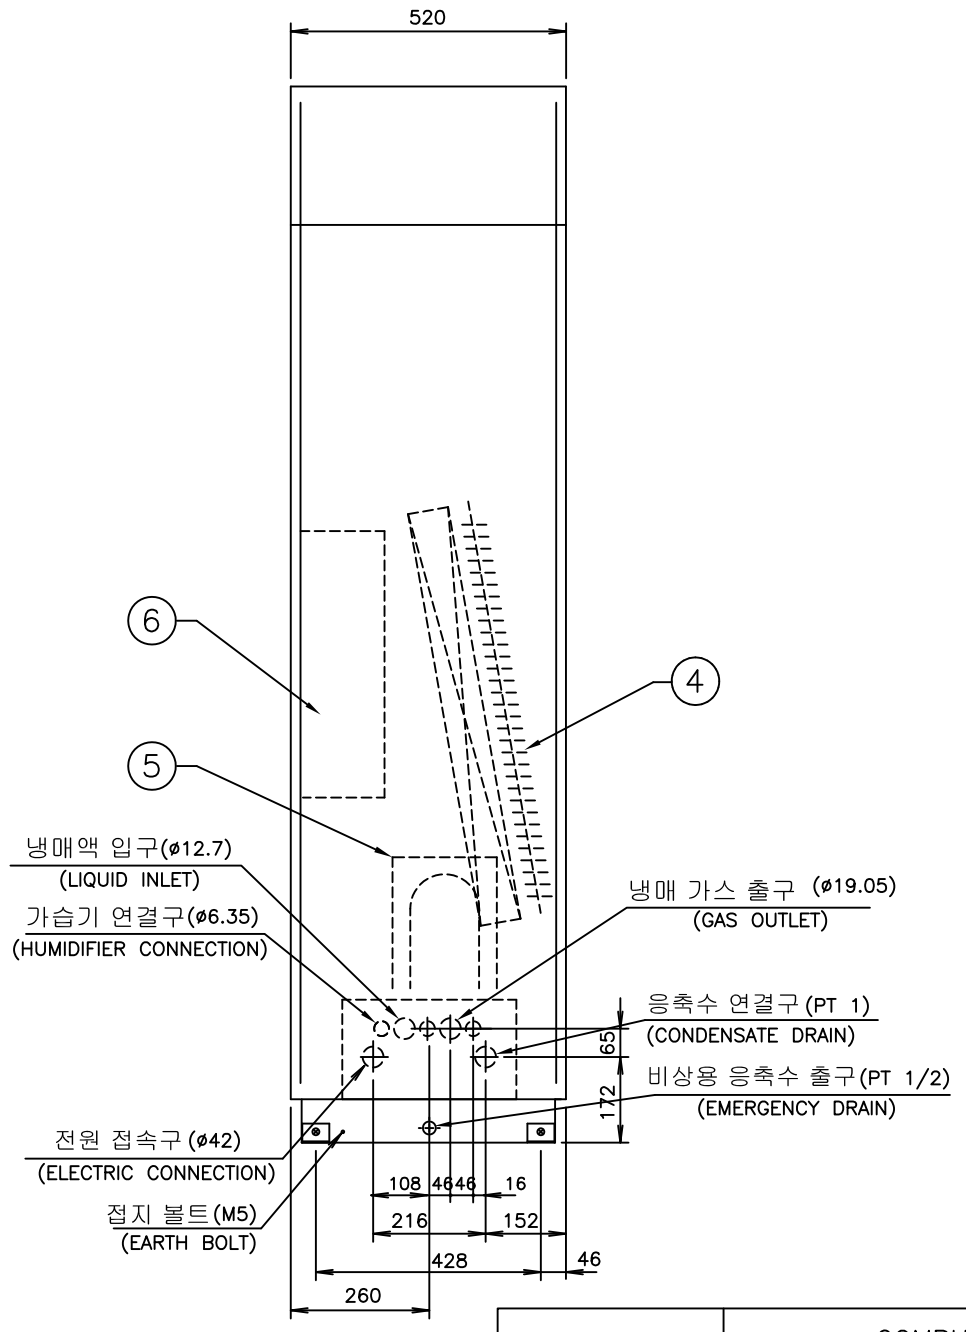

C	B	A	NO.	ALTERATION	DATE	CHKD	APPD
			1				
			2				
			3				
			4				

Q'T	Q'T	Q'T	ITEM	DESCRIPTION	MTL.	REMARK	SHEAR SIZE	WEIGHT
		1	01	EVAPORATOR	MULTI-PASS CROSS FINNED TUBE			
		1	02	BLOWER			DS# 1 5/8	
		1	03	FAN MOTOR		AC 3ø	V 0.4kW 8P 60Hz	
		1	04	HEATING COIL			ASS'Y	
		1	05	HUMIDIFIER			ASS'Y	
		1	06	CONTROL BOX			ASS'Y	
		1	07	SWITCH BOX			ASS'Y	
		1	08	HUMIDI. DISTRIBUTOR			ASS'Y	
		1	09	EXPANSION VALVE			5RT	
		1	10	DISTRIBUTOR	C3602BE		ø58	
		1	11	STRAINER(OR FILTER DRIER)			1/2"	
		1	12	HEADER	C1201T-1/2H		ø25.4	
		2	13	CHECK JOINT			ASS'Y	
		1	14	AIR FILTER	염화비닐		ASS'Y	
		1	15	AIR FILTER	부직포		ASS'Y	
		1	16	AIR INLET GRILLE			ASS'Y	
		1	17	AIR OUTLET GRILLE			ASS'Y	

SPECIFICATIONS

			UNIT / MODEL	HT - A5GG3
COOLING CAPACITY			kcal / h	13,500
NORMINAL AIR VOLUME			CMM	50
EXTERNAL STATIC PRESSURE			mmAq	0
HEATING	HEATING CAPACITY		kcal / h	12,900
	SOURCE	STEAM		kg/cm² G ROW
		HOT WATER		°C ROW
		ELECTRIC		15 kW
HUMIDIFIER	HUMIDIFIER CAPACITY		kg / h	5.5
	SOURCE	STEAM	kg/cm² G	
		HOT WATER	kg/cm² G	
		ELECTRIC	kW	4.2 kW x 1 STEP
PIPING	CONNECTION DIRECTION		COOLING	RIGHT (LEFT)
			POWER	RIGHT (LEFT)
			HUMIDIFIER	RIGHT (LEFT)
	CONNECTION SIZE		FOR COOLING	GAS 3/4" LIQUID 1/2"
			FOR HEATING	INLET A OUTLET A
STANDARD CONDITION	INDOOR		25°C ± 2°C DB, 55% ± 5% RH	
	OUTDOOR		35°C DB	

NOTE

1. STANDARD PIPING DIRECTION IS LEFT.
2. PAINTING COLOR : IVORY WHITE(RAL-341 OR MUNSELL NO. 5.6Y 9.0/1.0)
3. HEATER : MAGNET CONTROL
   HUMIDIFIER : ELECTRONIC ELECTRODE
4. OUTDOOR UNIT : RC-F5G7

TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT NAME	COMPUTER ROOM PACKAGED AIR CONDITIONER	TITLE	ASSEMBLY (AIR COOLED TYPE)
	MODEL	HT - A5GG3		
	DWN. BY / DESIGNED BY / CHKED. BY / APPD.		THIRD ANGLE PROJECTION	SCALE 1 : 15 / UNIT : mm
			REFERENCE DRW. NO.	
	Sewon (주) 세원센추리		DRAWING NO.	HTU050-13110GG