
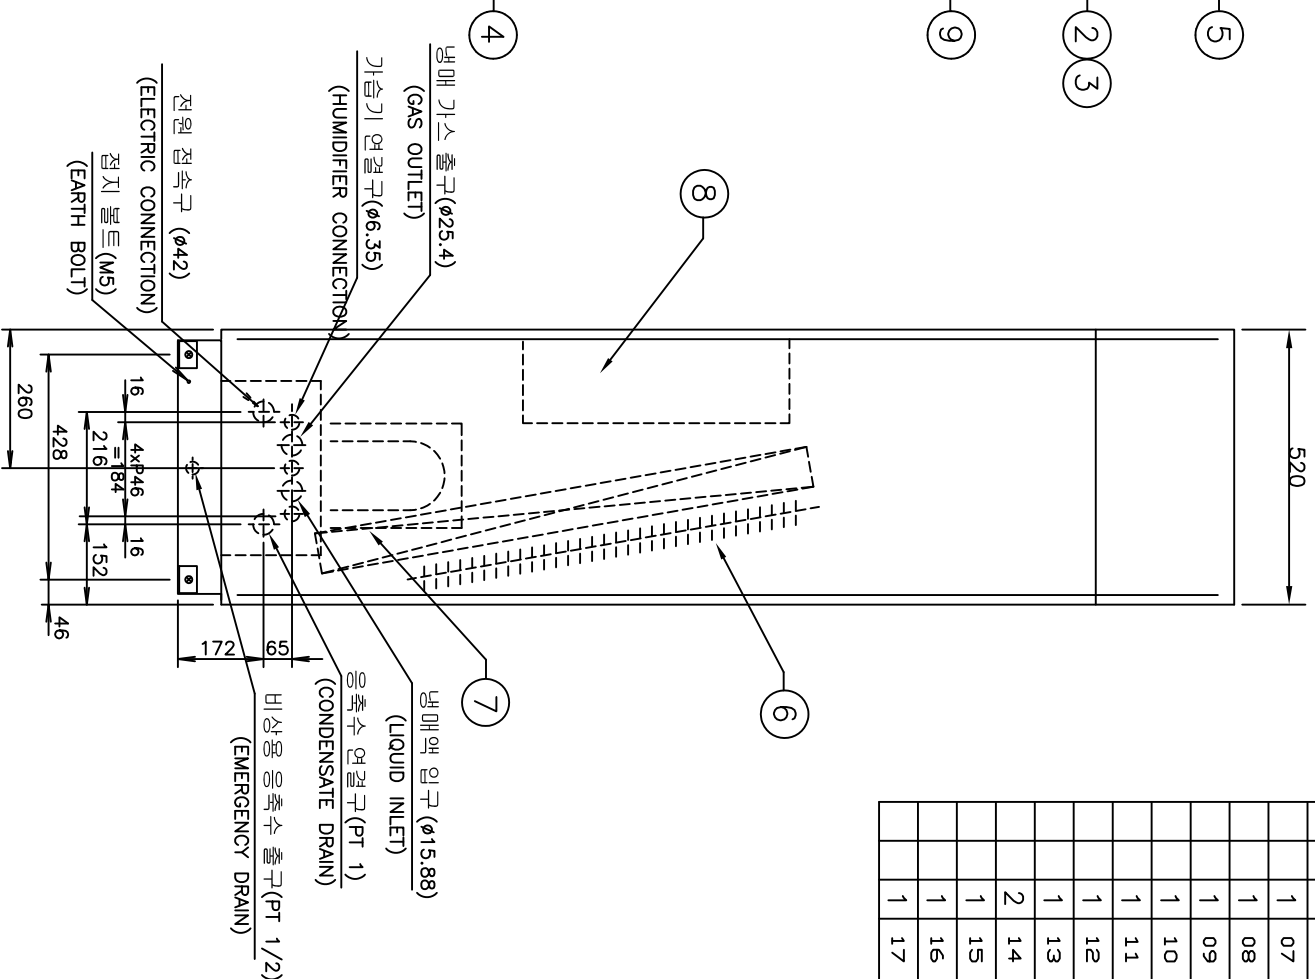


C	B	A	NO.	ALTERATION	DATE	CHKD	APPD	
			△					
			△					
			△					
Q'T	Q'T	Q'T	ITEM	DESCRIPTION	M.T.L.	REMARK	SHEAR SIZE	WEIGHT
1	01			EVAPORATOR		MULTI-PASS CROSS FINNED TUBE		
2	02			BLOWER		DS # 1-2/3 X 2EA		
2	03			FAN MOTOR	AC 3φ	V 0.4kW 6P 60HZ X 2EA		
1	04			AIR INLET GRILLE				
1	05			AIR OUTLET GRILLE				
1	06			HEATING COIL				
1	07			HUMIDIFIER				
1	08			CONTROL BOX				
1	09			SWITCH BOX				
1	10			DISTRIBUTOR	C3602BE	ø58		
1	11			STRAINER(OR FILTER DRIER)		5/8"		
1	12			HEADER	C1201T-1/2H	ø38		
1	13			HUMIDI. DISTRIBUTOR				
2	14			CHECK JOINT				
1	15			AIR FILTER	영화비닐			
1	16			AIR FILTER	부직포			
1	17			EXPANSION V/V		10RT		

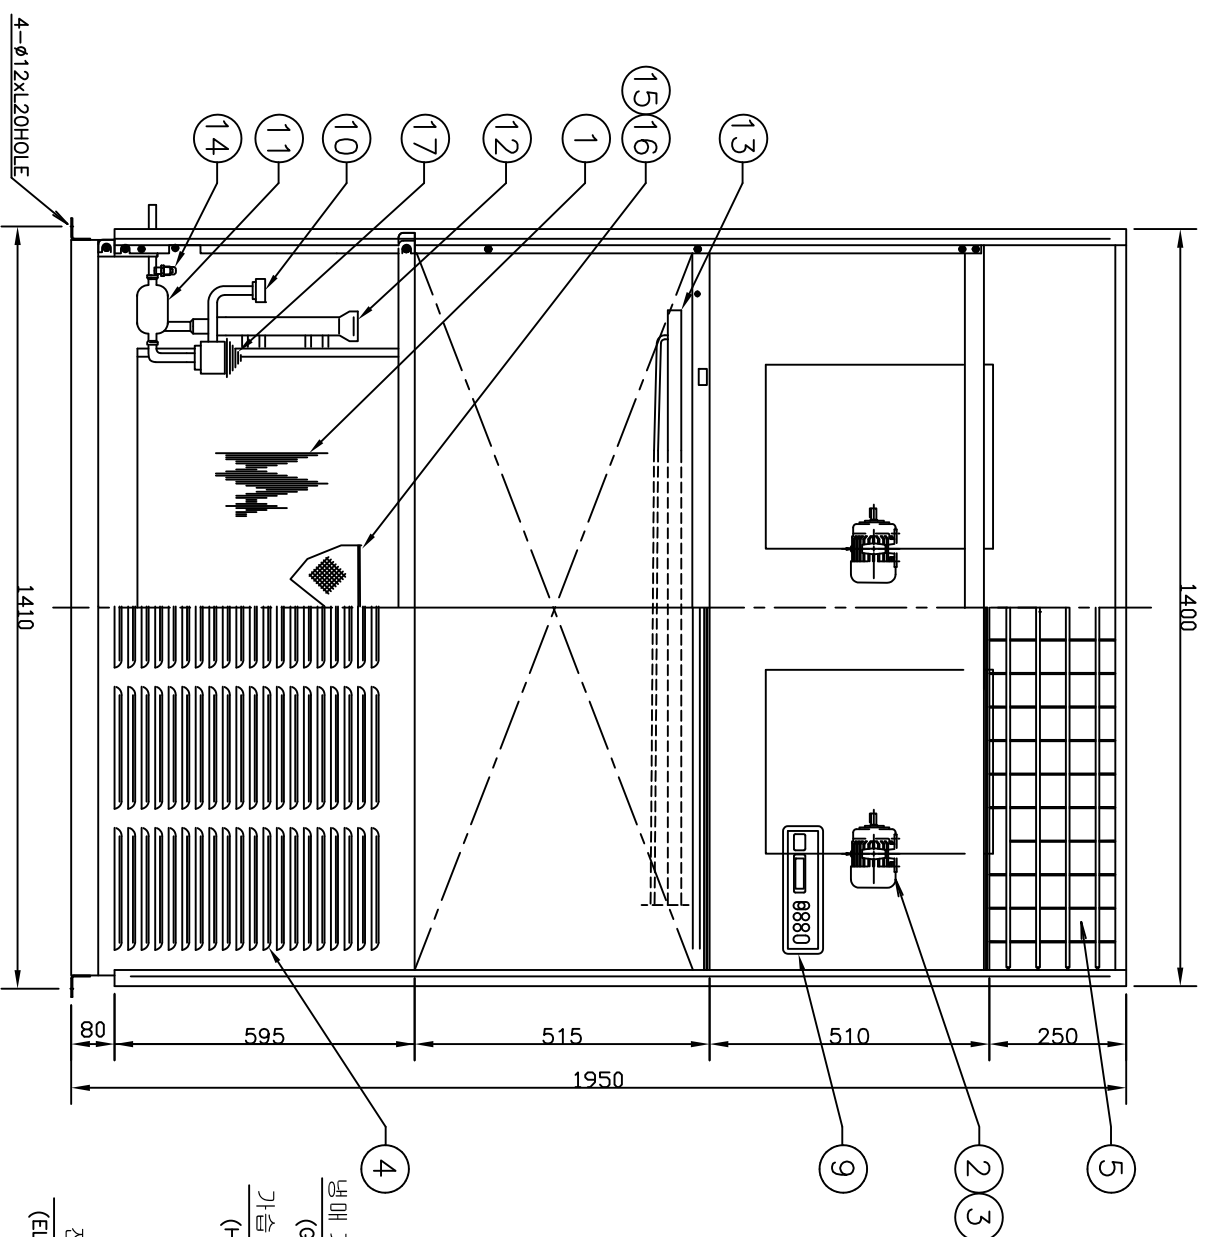

SPECIFICATIONS

		UNIT	MODEL
COOLING CAPACITY		kcal / h	HT - A10GG3
NOMINAL AIR VOLUME		CMAM	27,000
EXTERNAL STATIC PRESSURE		mmHg	105
HEATING CAPACITY		kcal / h	0
HEATING HOT WATER		kg/cm ² G	25,800
ELECTRIC		°C	30 kW
HUMIDIFIER CAPACITY		kg / h	7.0
HUMIDIFIER SOURCE		kg/cm ² G	
HOT WATER		kg/cm ² G	
ELECTRIC		kW	5.3 kW x 1 STEP
CONNECTION DIRECTION			
RIGHT			RIGHT
LEFT			LEFT
CONNECTION SIZE			
FOR COOLING		GAS 1"	LIQUID 5/8"
FOR HEATING		INLET	A OUTLET A
STANDARD CONDITION			
INDOOR		25°C ± 2°C DB, 55% ± 5% RH	
OUTDOOR		35°C DB	

- NOTE
1. STANDARD PIPING DIRECTION IS LEFT.
 2. PAINTING COLOR : IVORY WHITE(RAL-341 OR MUNSELL NO. 5.6Y 9.0/1.0)
 3. HEATER : MAGNET CONTROL
 4. OUTDOOR UNIT : RC-F10G7 x 1UNIT

TOLERANCES UNLESS OTHERWISE SPECIFIED

PRODUCT NAME COMPUTER ROOM PACKAGED AIR CONDITIONER

TITLE ASSEMBLY

MODEL HT - A10GG3

(AIR COOLED TYPE)

DESIGNED BY

THIRD ANGLE PROJECTION SCALE 1 : 15 UNIT : mm

CHKD. BY

REFERENCE DRW. NO.

APPD.

DRAWING NO. HTU100-13110GG



(주) 세원센추리