

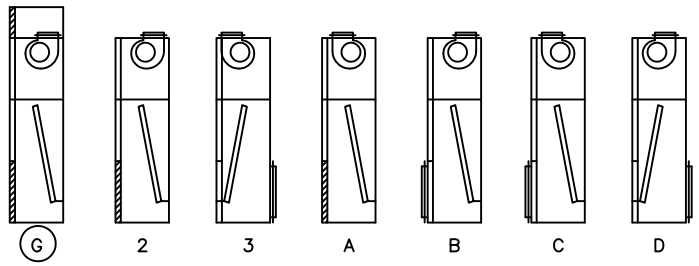

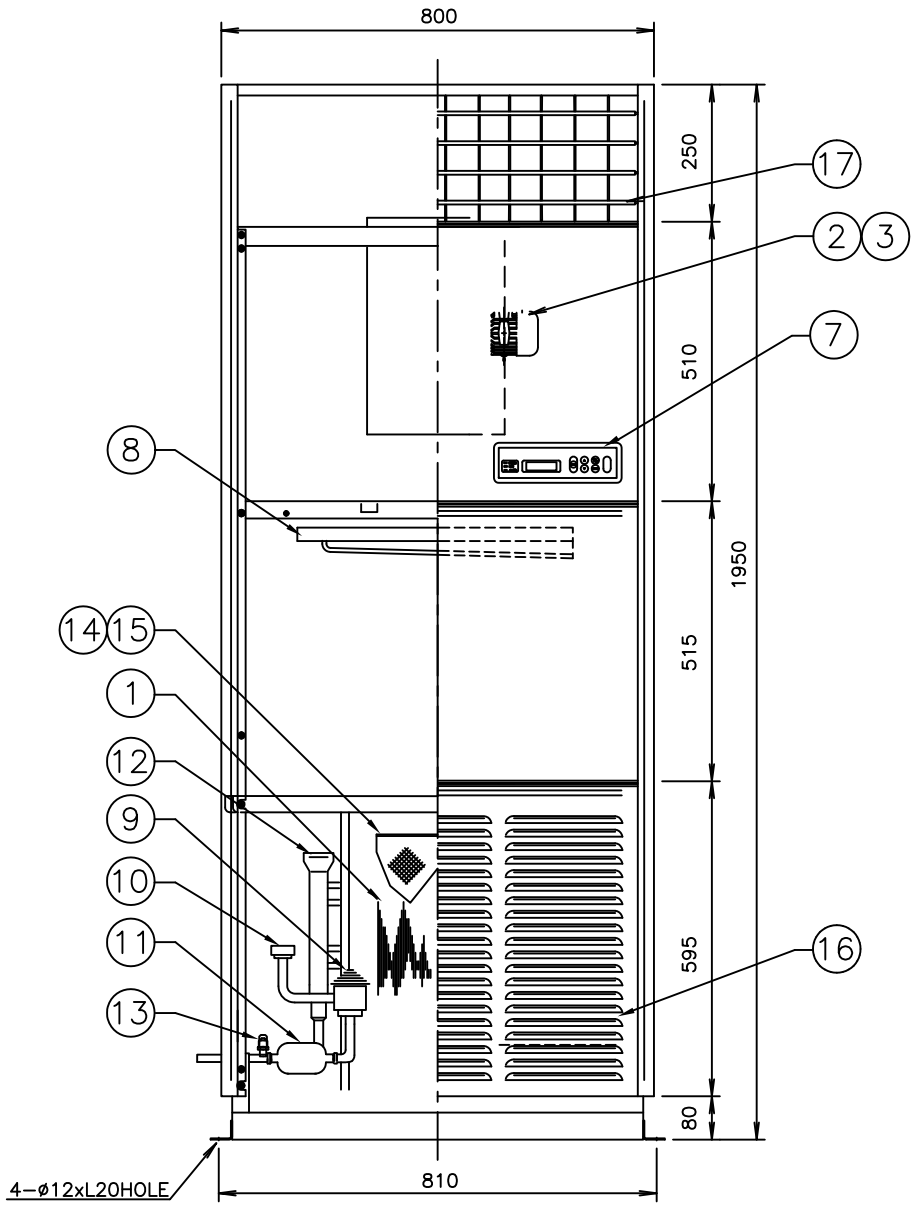

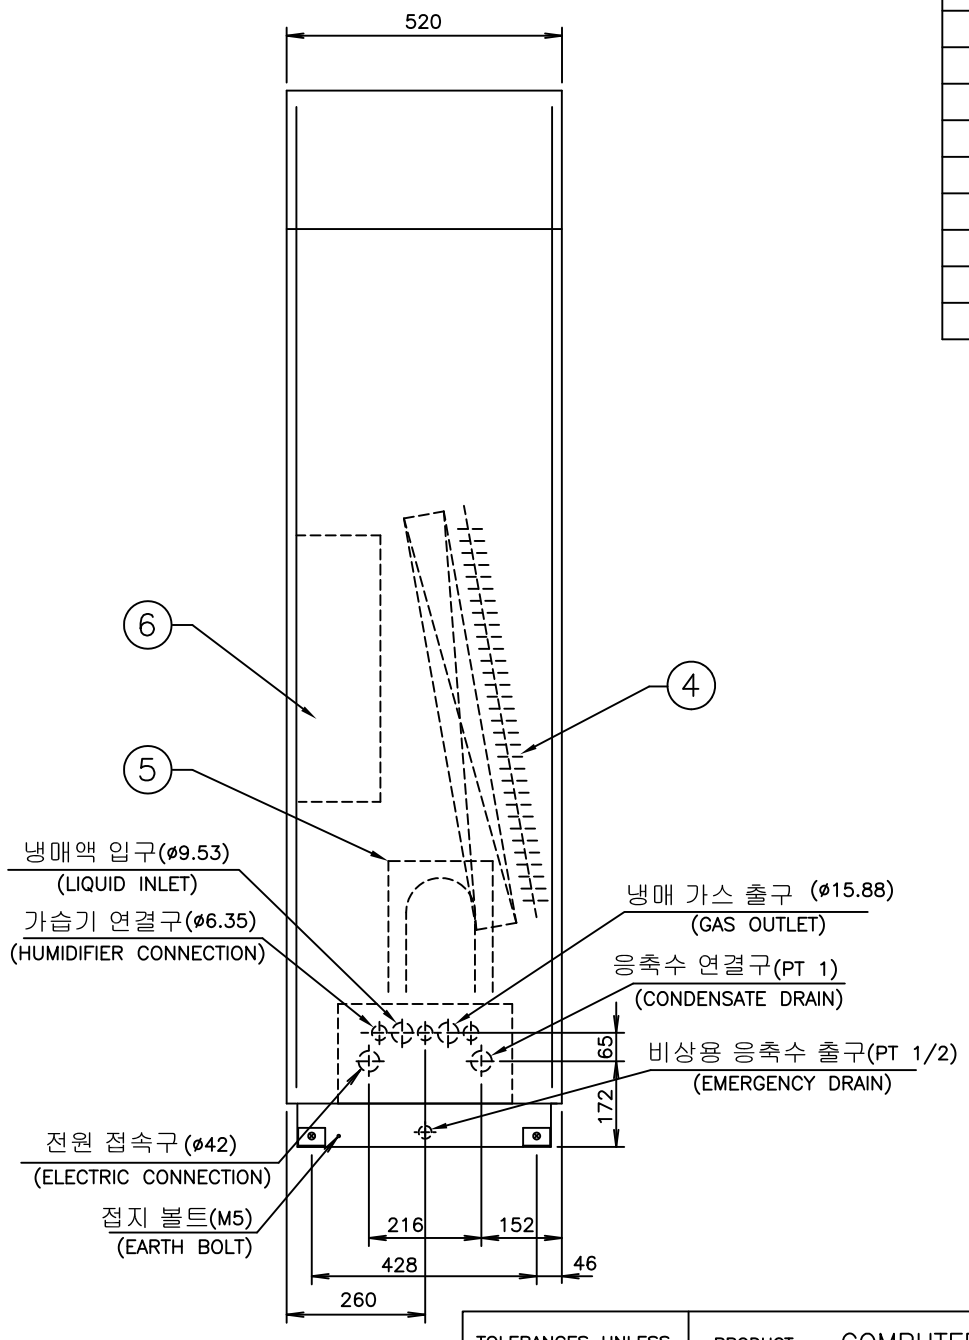

C	B	A	NO.	ALTERATION	DATE	CHKD	APPD
			1				
			2				
			3				
			4				

Q'T	Q'T	Q'T	ITEM	DESCRIPTION	MTL.	REMARK	SHEAR SIZE	WEIGHT
		1	01	EVAPORATOR	MULTI-PASS CROSS FINNED TUBE			
		1	02	BLOWER			DS# 1 2/3	
		1	03	FAN MOTOR		AC 3ø V 0.2kW	8P 60Hz	
		1	04	HEATING COIL			ASS'Y	
		1	05	HUMIDIFIER			ASS'Y	
		1	06	CONTROL BOX			ASS'Y	
		1	07	SWITCH BOX			ASS'Y	
		1	08	HUMI. DISTRIBUTOR			ASS'Y	
		1	09	EXPANSION VALVE			3RT	
		1	10	DISTRIBUTOR	C3602BE		ø58	
		1	11	STRAINER(OR FILTER DRIER)			3/8"	
		1	12	HEADER	C1201T-1/2H		ø22.2	
		2	13	CHECK JOINT			ASS'Y	
		1	14	AIR FILTER	염화비닐		ASS'Y	
		1	15	AIR FILTER	부직포		ASS'Y	
		1	16	AIR INLET GRILLE			ASS'Y	
		1	17	AIR OUTLET GRILLE			ASS'Y	

SPECIFICATIONS

		UNIT / MODEL	HT - A3GG3
COOLING CAPACITY		kcal / h	8,100
NOMINAL AIR VOLUME		CMM	30
EXTERNAL STATIC PRESSURE		mmAq	0
HEATING	HEATING CAPACITY	kcal / h	7,740
	SOURCE STEAM		kg/cm² G ROW
	SOURCE HOT WATER		°C ROW
	SOURCE ELECTRIC		9 kW
HUMIDIFIER	HUMIDIFIER CAPACITY	kg / h	2.7
	SOURCE STEAM	kg/cm² G	
	SOURCE HOT WATER	kg/cm² G	
	SOURCE ELECTRIC	kW	2 kW x 1 STEP
PIPING	CONNECTION DIRECTION	COOLING	RIGHT (LEFT)
		POWER	RIGHT (LEFT)
		HUMIDIFIER	RIGHT (LEFT)
	CONNECTION SIZE	FOR COOLING	GAS 5/8" LIQUID 3/8"
		FOR HEATING	INLET A OUTLET A
STANDARD CONDITION	INDOOR		25°C ± 2°C DB, 55% ± 5% RH
	OUTDOOR		35°C DB

NOTE

1. STANDARD PIPING DIRECTION IS LEFT.
2. PAINTING COLOR : IVORY WHITE(RAL-341 OR MUNSELL NO. 5.6Y 9.0/1.0)
3. HEATER : MAGNET CONTROL
   HUMIDIFIER : ELECTRONIC ELECTRODE
4. OUTDOOR UNIT : RC-F3G7

TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT NAME	COMPUTER ROOM PACKAGED AIR CONDITIONER	TITLE	ASSEMBLY (AIR COOLED TYPE)
	MODEL	HT - A3GG3		
	DWN. BY / DESIGNED BY / CHKED. BY / APPD.		THIRD ANGLE PROJECTION	SCALE 1:15 / UNIT : mm
			REFERENCE DRW. NO.	
	Sewon (주) 세원센추리		DRAWING NO.	HTU030-13110GG